RoHS2.0 Compliant

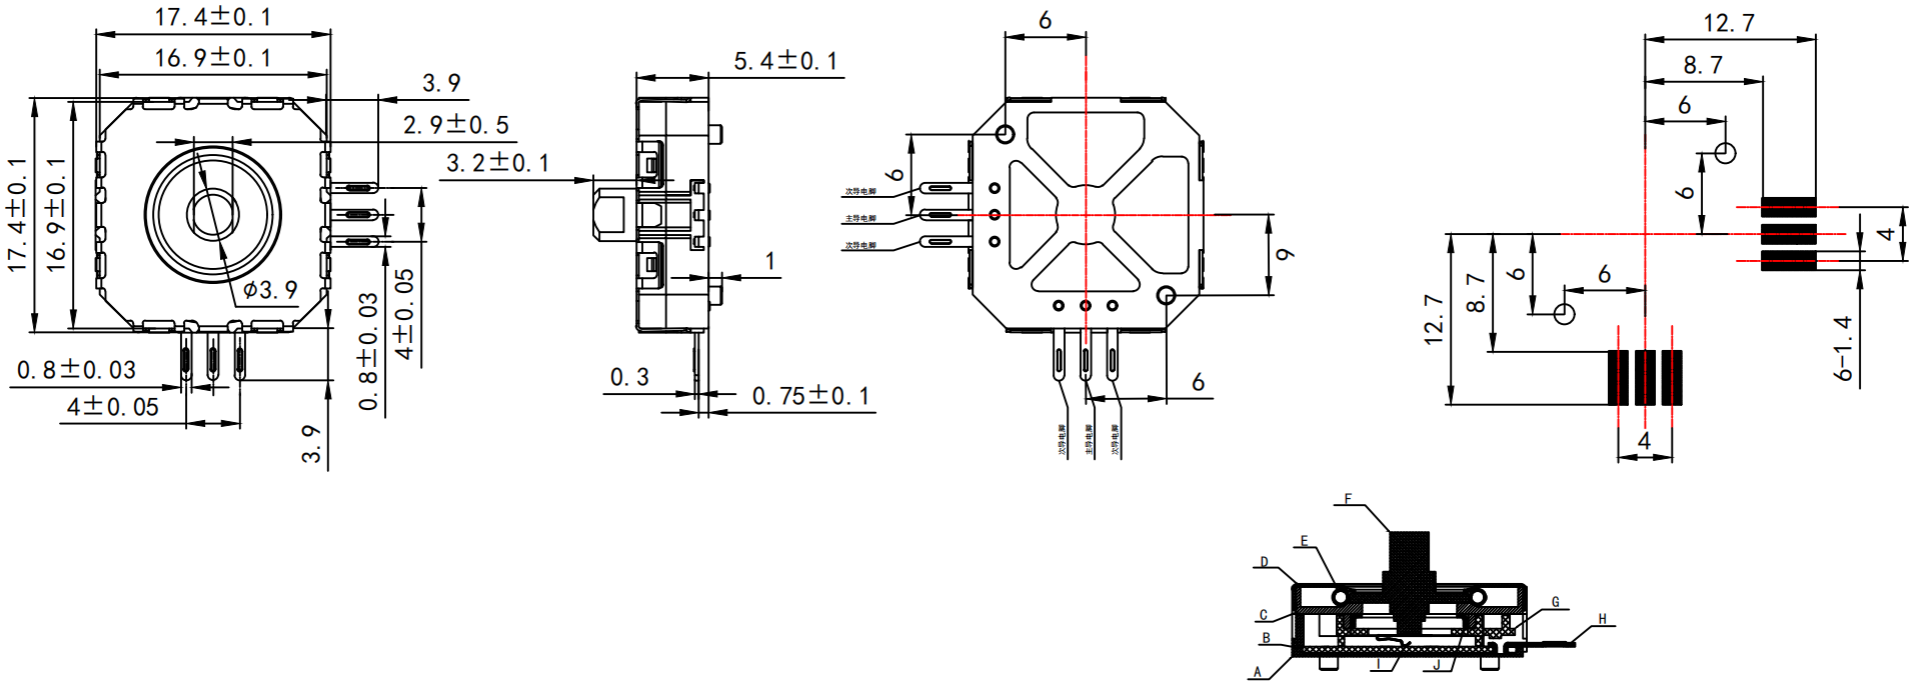

Technical requirements

1. Rated electric load: DC5V 50mA
2. Insulation resistance: ≥100MΩ
3. Withstand voltage strength: 50Hz/1minAC250V
4. Electrical life: 50,000 cycles Min
5. Ambient temperature: -10° C~ +60°
6. Stroke: 0.15±0.05mm
7. Action force: 100gf ±50gf

TOLERANCE	
X.XXX	±0.05
X.XX	±0.15
X.X	±0.20
X.	±0.30
ANGLE	±5.0°

PROTECTON

东莞市恒祺电子科技有限公司
Dongguan Hengqi Electronic Technology Co., Ltd

https://www.hq-dz.com phone:15812872448

TITLE: 多功能轻触开关

PART NO:成品图

DRAWING NO:HQ-KC-01

DRAWN:		DATE:	18-10-08	UNIT: mm
CHECKED:		DATE:	18-10-08	SCALE: FULL
APPROVED:		DATE:	18-10-08	SIZE: A4